

Vehicle/Track Scales

SURVIVOR® PT-M

Levertronic Truck Scale — Concrete Deck



**SURVIVOR...durable performance
measured not in years, but decades.**



Package includes: Steel weighbridge; lever system; pit angle coping; deck rebar; deck channel; bumper plates; foundation bolts; assembly bolts; manhole frame(s) and cover(s); inboard transverse lever (for electronic conversion) is furnished unless outboard lever is specified at time of order; standard paint system is a high-performance epoxy base coat.

Package does not include: Foundation rebar; corrugated sheeting; home run cable; concrete; indicator; printer; freight charges including material handling, shipping charges, transportation permits and fees, escort(s) charge, and insurance transportation fees.


Standard Features **HEAVY DUTY**

- In-pit foundation
- Ideal for limited access locations
- Structural steel pipe lever system
- NTEP-certified, COC#05-018
- Standard levers - 32.5 ton sectional rating
- Capacities to 200 tons
- Standard widths from 10' to 14'

Scale Options

Load cell stand, steel deck option, additional manhole frames and covers, conversion S-beam load cell(s), load cell mounting hardware, indicator, printer or other peripheral equipment

*Illustration is for
reference only*

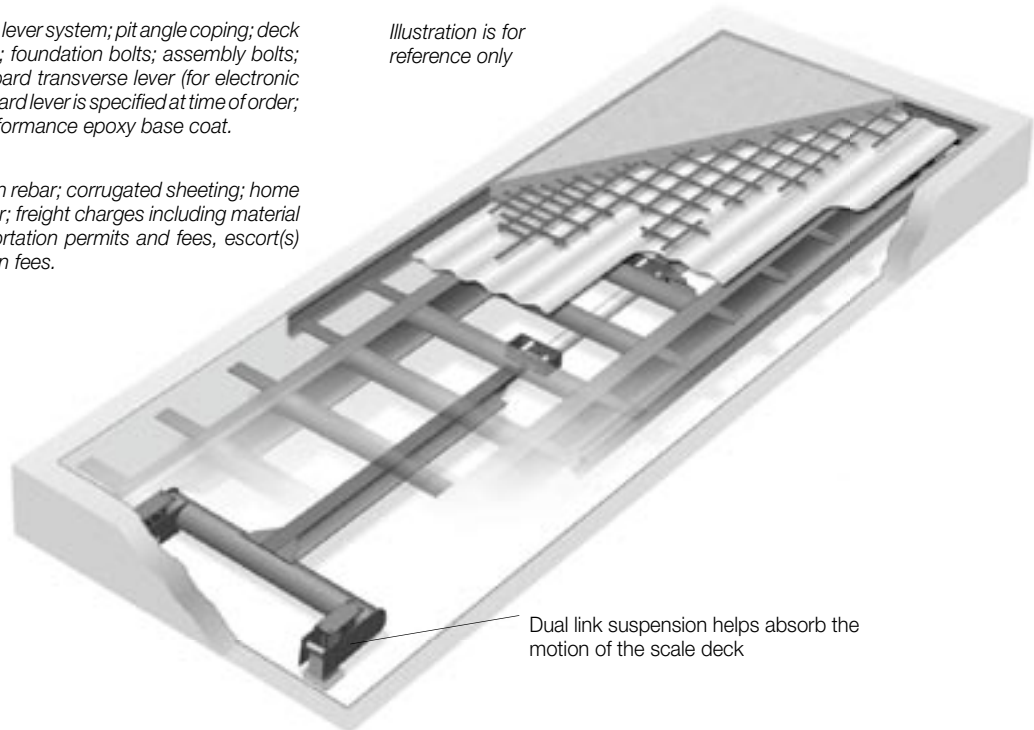

Specifications

FULL SCALE CAPACITY:

Standard 60,000 lb to 200,000 lb
Custom up to 400,000 lb

CONCENTRATED LOAD CAPACITY (CLC):

Standard 50,000 lb to 70,000 lb
Custom up to 100,000 lb

APPROVALS:

NTEP-certified per H-44, Class III L,
COC# 05-018

WARRANTY:

Five-year limited warranty on the weighbridge
Seven-year limited warranty on the lever system, excluding parts
One-year warranty on pivots, bearings, suspension, and mounting parts of the corner assemblies
Two-year parts warranty, including lightning protection (please refer to Warranty Statement on page VTS-62)
Up to five-year "build your own" lightning extended warranty (see page VTS-60)

Specifications subject to change without notice

RICE LAKE
WEIGHING SYSTEMS
Commitment Beyond Measurement®



VTS-41

SURVIVOR PT-M — Levertronic Truck Scale (continued)

Specifications

SURVIVOR PT-M - CONCRETE DECK - 10 FOOT WIDTH

LENGTH*	FULL SCALE CAPACITY	PART NUMBER	MODEL NUMBER	EST. SHIPPING WEIGHT	DECK THICKNESS	NUMBER OF LEVERS	CLC (TONS)
40 ft	50 tons	90085	540P10-C	13,500 lb	5"	3	25
50 ft	60 tons	90086	650P10-C	16,900 lb	5"	4	30
60 ft	100 tons	90012	1060P10-C	20,700 lb	6"	4	30
70 ft	100 tons	90020	1070P10-C	25,400 lb	6"	5	30
80 ft	100 tons	90028	1080P10-C	28,000 lb	6"	5	32.5

SURVIVOR PT-M - CONCRETE DECK - 11 FOOT WIDTH

LENGTH*	FULL SCALE CAPACITY	PART NUMBER	MODEL NUMBER	EST. SHIPPING WEIGHT	DECK THICKNESS	NUMBER OF LEVERS	CLC (TONS)
40 ft	50 tons	90078	540P11-C	14,400 lb	5"	3	25
50 ft	60 tons	90079	650P11-C	17,900 lb	5"	4	30
60 ft	100 tons	90080	1060P11-C	21,900 lb	6"	4	30
70 ft	100 tons	90082	1070P11-C	26,800 lb	6"	5	30
80 ft	100 tons	90083	1080P11-C	29,600 lb	6"	5	32.5

SURVIVOR PT-M - CONCRETE DECK - 12 FOOT WIDTH

LENGTH*	FULL SCALE CAPACITY	PART NUMBER	MODEL NUMBER	EST. SHIPPING WEIGHT	DECK THICKNESS	NUMBER OF LEVERS	CLC (TONS)
40 ft	50 tons	90087	540P12-C	15,500 lb	5"	3	25
50 ft	60 tons	90088	650P12-C	19,100 lb	5"	4	30
60 ft	100 tons	90089	1060P12-C	23,400 lb	6"	4	30
70 ft	100 tons	90090	1070P12-C	28,500 lb	6"	5	30
80 ft	100 tons	90091	1080P12-C	31,600 lb	6"	5	32.5

*Lengths and widths for SURVIVOR PT-M scales are the I.D. dimensions of the scale