


## RoughDeck™ HE Hostile Environment Stainless Steel Low-Profile Floor Scale



The 6" stainless steel channels provide superior protection for load cells and cable.


### Approvals

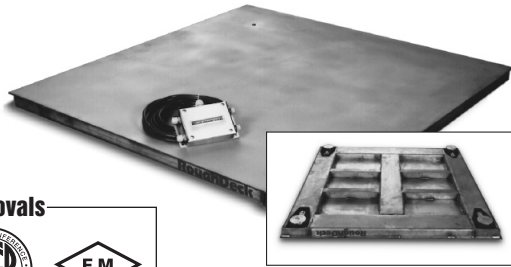

The load cells are recessed within the channel and protected on all sides. SUREFOOT supports provide a superior load introduction surface, reducing extraneous forces which might affect scale accuracy.

### Standard Features

- Rugged washdown design
- 304 stainless steel construction
- Smooth stainless steel deck
- Four stainless steel, welded seal IP67, shear beam load cells
- Load cells protected on all four sides
- Rigid 304 stainless steel channel frame
- Remote EL604STA stainless steel NEMA 4X junction box
- Four adjustable stainless steel SUREFOOT support feet
- 20 ft of SURVIVOR® EL147HE hostile environment load cell cable
- Threaded eyebolt holes for easy lifting
- FM-approved load cells



Remote EL604STA stainless steel NEMA 4X junction box with 20 ft of hostile environment load cell cable.

## Specifications

### APPROVALS:

NTEP - certified, CC# 92-001A9  
 Designed to meet or exceed H44,  
 5000, 10,000 - Class III 5000d  
 2000 - Class III 4000d

### END LOAD CAPACITY:

100% full scale at 2000 lb and 5000 lb  
 80% full scale at 10000 lb

### mV/V OUTPUT:

1.50-1.87 mV/v

### CABLE LENGTH:

20 ft (6.1 m)

### WARRANTY:

5-year limited warranty

### BASES

PART #	SIZE (W x L x H)	CAPACITY	EST. SHIP WT
18680*	2.5' x 2.5' x 3.5"	2000 lb (1000 kg)	173 lb
18681*	3' x 3' x 3.5"	2000 lb (1000 kg)	232 lb
18682	4' x 4' x 3.5"	5000 lb (2500 kg)	375 lb
18683	4' x 4' x 3.5"	10,000 lb (5000 kg)	490 lb
18684	4' x 5' x 3.5"	5000 lb (2500 kg)	437 lb
18685	4' x 5' x 3.5"	10,000 lb (5000 kg)	567 lb
18688	5' x 5' x 3.5"	5000 lb (2500 kg)	541 lb
18689	5' x 5' x 3.5"	10,000 lb (5000 kg)	696 lb
18693	5' x 7' x 3.5"	10,000 lb (5000 kg)	929 lb

\* Not recommended for use with pallet jacks.