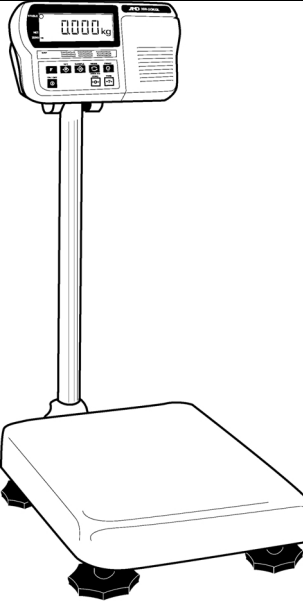


HV-G / HW-G Series

Platform Scales

<p>HW-G: Resolution up to 1/10,000 Includes: Percent & Remote Zeroing</p> <p>HV-G: Triple Resolution - 3 Scales in 1</p> <p>14 Models & 3 Platform Sizes to choose from</p> <p>Overload Protection</p>		<p>Choice of Display: LCD (Battery or AC) or VFD (AC)</p> <p>Optional Built-In Printer for VFD Models</p> <p>Up to 500 lb (220 kg) Capacity</p> <p>Stainless Steel Weighing Pan</p>
--	---	--

Features

- Counting, Percentage & Comparator Functions (standard)
- Battery Operation (GL models) for portability (Batteries not included / AC adapter standard)
- Water & Dust Resistant (IP-65) Platform
- Bi-Directional RS-232C (standard)
- Setpoint Control for simple filling/batching/checkweighing
- Wide Selection of Capacities

Model Selection Guide - Which model is best for you?

Model

HV- **KGL** - LCD
Capacity **V** - VFD

HW- **KGL** - LCD
Capacity **V** - VFD

Display: LCD (L Type) or VFD (V Type)
Capacity: HV-15, 60, 200(kg) / HW-10, 60, 100, 200(kg)
Resolution: 0.001kg to 0.1kg / 0.002 lb to 0.2 lb
Pan Size: Large (390 x 530 mm / 15.4 x 20.9 in.)
 Medium (330 x 424 mm / 13.0 x 16.7 in.)
 Small (250 x 250 mm / 9.8 x 9.8 in.)
Range: Single Range (HW-G Series)
 0.1kg to 0.02 kg / 0.002 lb to 0.05 lb
 Triple Range (HV-G Series)
Example: HV-15KGL
 Capacity: 3kg/6 lb Resolution: 0.001kg / 0.002 lb
 Capacity: 6kg/15 lb Resolution: 0.002kg / 0.005 lb
 Capacity: 15kg/30 lb Resolution: 0.005kg / 0.01 lb

Fax-on-Demand

(800) 726-7099 / (408) 263-0560, Press 2

Document #1005

www.andweighing.com

last saved:1/23/02

AND
A&D WEIGHING
...Clearly a Better Value



1555 McCandless Drive
Milpitas, CA 95035, USA
Toll Free: (800) 726-7099
Phone: (408) 263-5333
Fax: (408) 263-0119

Specifications:

(GL Series has a Liquid Crystal Display (LCD) & GV Series has a Vacuum Fluorescent Display (VFD))

	HV-15KGL / GV			HV-60KGL / GV			HV-200KGL / GV		
Capacity (kg)	15	6	3	60	30	15	220	150	60
Resolution (kg)	0.005	0.002	0.001	0.02	0.01	0.005	0.1	0.05	0.02
Capacity (lb)	30	15	6	150	60	30	500	300	150
Resolution (lb)	0.01	0.005	0.002	0.05	0.02	0.01	0.2	0.1	0.05
Capacity (oz)	480	240	96	2400	960	480	8000	4800	2400
Resolution (oz)	0.2	0.1	0.05	1	0.5	0.2	5	2	1
Capacity (lb-oz)	30			-	-	-	-	-	-
Resolution (lb-oz)	0.1			-	-	-	-	-	-
Max. Count	15,000 pieces			12,000 pieces			11,000 pieces		
Operating Temp.	-10°C ~ 40°C / 14° F ~ 104° F								
Linearity	±5g	±2g	±1g	±20g	±10g	±5g	±100g	±50g	±25g
PanSize (mm)	250(W) x 250(D) mm			330(W) x 424(D) mm			390(W) x 530(D) mm		
Pan Size (inch)	9.8(W) x 9.8(D) inches			12.95(W) x 16.69(D) inches			15.35(W) x 20.87(D) inches		
Physical Dim. (mm)	275(W) x 474(D) x 368(H)			330(W) x 621(D) x 771(H)			390(W) x 712(D) x 773(H)		
Physical Dim. (inch)	10.8(W) x 18.7(D) x 14.5(H)			13.0(W) x 24.4(D) x 30.4(H)			15.4(W) x 28.0(D) x 30.4(H)		
Power	HV-GL Series: AC Adapter or 6 'D' size alkaline batteries (600 hours) HW-GV Series: AC Mains only								
Weight (Approx.)	6 kg / 13.2 lb			11 kg / 24.3 lb			17 kg / 37.5 lb		
Std. Accessories	AC Adapter (for GL Series only), Display Cover and Manual								

	HW-10KGL / GV	HW-60KGL / GV	HW-100GL / GV	HW-200KGL / GV
Capacity (kg)	10	60	100	220
Resolution (kg)	0.001	0.005	0.01	0.02
Capacity (lb)	20	150	200	500
Resolution (lb)	0.002	0.01	0.02	0.05
Capacity (oz)	320	2400	3200	8000
Resolution (oz)	0.05	0.2	0.5	1
Capacity (lb-oz)	20	-	-	-
Resolution (lb-oz)	0.1	-	-	-
Max. Count	10,000 pieces	12,000 pieces	10,000 pieces	11,000 pieces
Operating Temp.	-10°C ~ 40°C / 14° F ~ 104° F			
Linearity	±2g	±10g	±20g	±40g
PanSize (mm)	250 x 250 mm	330 x 424 mm	390 x 530 mm	
W x D (inch)	9.8 x 9.8 inches	12.95 x 16.69 inches	15.35 x 20.87 inches	
Phys. Dim. (mm)	275 x 474 x 368	330 x 621 x 771	390 x 712 x 773	
W x D x H (inch)	10.8 x 18.7 x 14.5	13.0 x 24.4 x 30.4	15.4 x 28.0 x 30.4	
Power	HW-GL Series: AC Adapter or 6 'D' size alkaline batteries (600 hours) HW-GV Series: AC Mains only			
Weight (Approx.)	6 kg / 13.2 lb	11 kg / 24.3 lb	17 kg / 37.5 lb	
Std. Accessories	AC Adapter (for GL Series only), Display Cover and Manual			

Specifications are subject to change without notice

Options

- HV/W-03G... Comparator Relay Outputs/Buzzer
- HV/W-04G... RS-422/485 Interface
- HV/W-06G... Built-in Printer for HV-GV/HW-GV

Accessories

- AD-8920.....External Display
- AD-1191.....Compact Printer
- AD-8118AJournal Printer
- AD-8118B.... Universal Printer
- AD-8121A.... Multi-Function Printer
- .FV-05..... AC Adapter (120V)
- .FV-06..... AC Adapter (240V)

Fax-on-Demand

(800) 726-7099 / (408) 263-0560, Press 2
Document #1005

www.andweighing.com

last saved:1/23/02



1555 McCandless Drive
Milpitas, CA 95035, USA
Toll Free: (800) 726-7099
Phone: (408) 263-5333
Fax: (408) 263-0119